


# Piezoresistive accelerometer

## Model 7270A

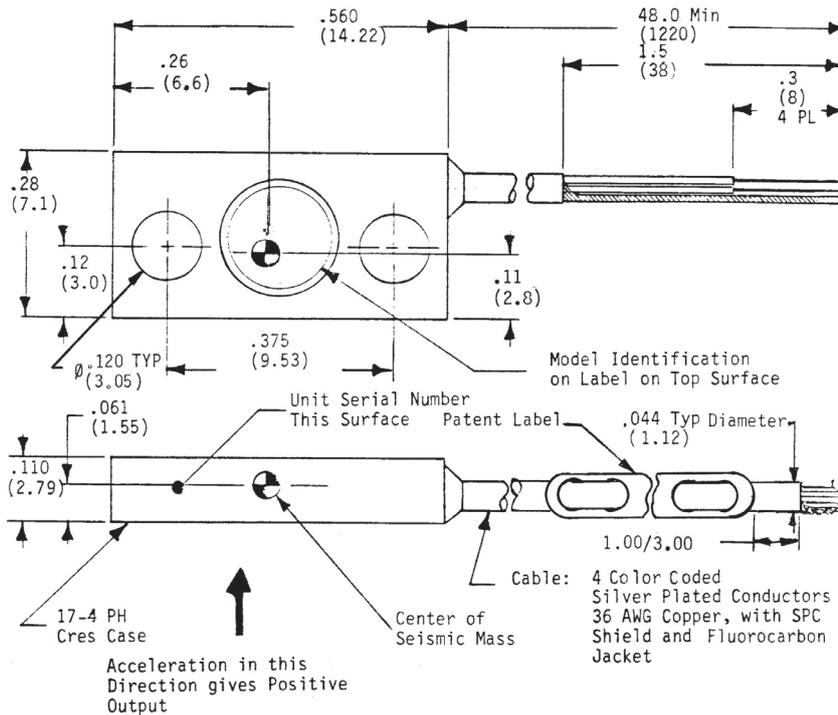

Standard Tolerance	
Inches	(Millimeters)
.XX	= ±.03 .X = ±.8
.XXX	= ±.010 .XX = ±.25

### Key features

- 2K, 6K, 20K, 60K and 200K full scale ranges
- High resonance frequency
- Broad frequency response
- Minimal zero shift after shock

### Description

The Endevco model 7270A is a family of rugged undamped piezoresistive accelerometers designed for shock applications. The model 7270A features minimal mass loading, broad frequency response, and minimum zero shift during a shock event.

The 7270A uses a unique micro-machined, piezoresistive sensor with gages arranged in a full wheatstone bridge circuit. The extremely small size and efficient construction allow for exceptionally high resonant frequency. The flat, lightweight case is designed to reduce the effect of case resonance for optimal frequency response.

200,000g range is subject to International Traffic in Arms Regulations (ITAR), and as such a license is required for shipments outside the U.S. and other restrictions may apply.

## Piezoresistive accelerometer | Model 7270A

All specifications are referenced at +75°F (+24°C) and 10 Vdc, unless otherwise noted. Calibration data, traceable to National Institute of Standards and Technology (NIST), is supplied.

Specifications						
Dynamic characteristics	Units	2K	6K	20K	60K	200K
Linear range	g	2,000	6,000	20,000	60,000	200,000
Sensitivity min/typ [1]	μV/g	50/100	15/30	5/10	1.5/3	.5/1
Frequency response +/-5%	Hz	0 to 10,000	0 to 20,000	0 to 50,000	0 to 100,000	0 to 150,000
Natural frequency (typ)	kHz	90	180	350	700	1200
Shock limit [max]	g	10,000	18,000	60,000	180,000	200,000
Zero measureand output (max at 10V)	mV	+/-100	+/-100	+/-100	+/-100	+/-100
Transverse sensitivity (max)	%	5	5	5	5	5
Thermal zero shift [2]	mV	10	10	10	10	10
-30°F to +150°F (-34°C to +66°C)						
Thermal sensitivity shift	%/C	-0.12	-0.12	-0.12	-0.12	-0.12
Electrical characteristics						
Excitation	Vdc	2 to 12 (10 standard)				
Resistance						
input	Ω	650 ± 300				
output	Ω	650 ± 300				
Isolation resistance		100 MΩ min at 100 VDC between leads (shorted together) and cable shield or case				
Physical characteristics						
Case material		17-4 CRES				
Weight (excluding cable)	grams	1.5				
Cable		(4) 36 AWG SPC, shield, FEP jacket cable weight 0.10 oz/ft (2.83 g/ft)				
Mounting		4-40 high strength screws (x2) Recommended mounting torque, 8 ± 2 lbf-in (0.9 N-m)				
Environmental						
Temperature						
Operating (3)	°C (F°)	- 55 to + 121 (- 67 to + 250)				
Storage	°C (F°)	- 55 to + 121 (- 67 to + 250)				
Calibration data						
Data for sensitivity, ZMO, input and output resistance are supplied on the calibration						


# Piezoresistive accelerometer | Model 7270A

Accessories		
Options	Description	
EH137	[2] 4-40 high strength screws	Included
EHW265	[2] No. 4 washers	Included
7970	Triaxial mounting block	Optional
136	DC amplifier, 3-channel benchtop	Optional
K7270AM6	Mechanical isolator conversion kit	Optional

Options	
Options	Description
M4	1/4 - 28 stud mount package
M6	Enclosed in mechanical isolator with 1/4 - 28 stud
M7	Ruggedized with low noise cable
M16	Calibrated at 5V excitation
M26	Calibrated at 3.3V excitation
-Z	Fixed resistors only

## Notes

1. Sensitivity measured at 5,000g, except for 2,000g model measured at 2,000g
2. Operating temperatures above 93C (200F) result in unpredictable thermal zero shift. TZS should be monitored and/or managed by auto-zeroing to insure no loss in data due to signal saturation.
3. 150°F is the maximum recommended operating temperature with 10 Vdc excitation. In applications requiring higher operating temperatures, lower excitation voltage is recommended.
4. Maintain high levels of precision and accuracy using Endevco's factory calibration services. Call Endevco's inside sales force at 866-ENDEVCO for recommended intervals, pricing and turn-around time for these services as well as for quotations on our standard products.
5. Model number definition:

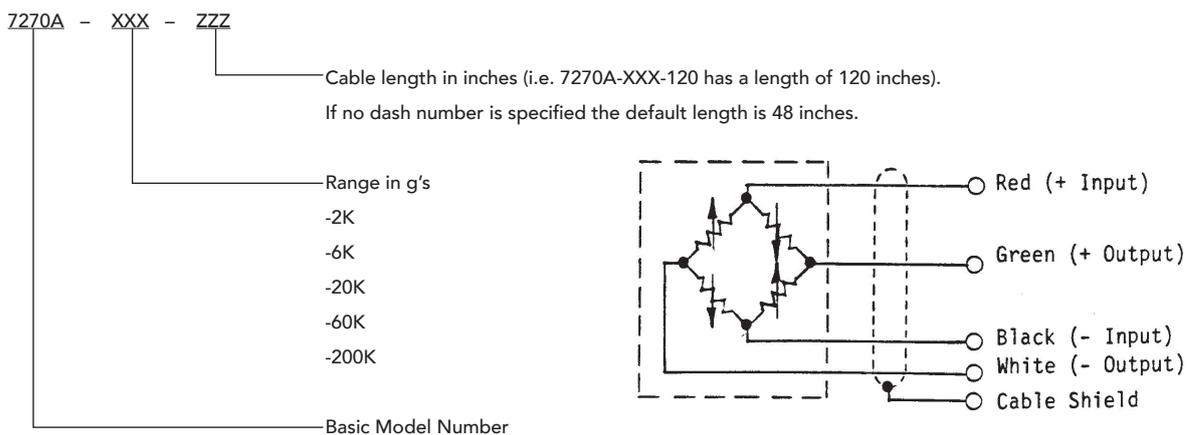



[www.endevco.com](http://www.endevco.com) | Tel: +1 (866) ENDEVCO [+1 (866) 363-3826] | 10869 NC-903, Halifax, NC 27839 USA

© 2020 PCB Piezotronics of North Carolina, Inc. (doing business as Endevco). In the interest of constant product improvement, specifications are subject to change without notice. PCB®, ICP®, Swiveler®, Modally Tuned®, and IMI® with associated logo are registered trademarks of PCB Piezotronics, Inc. in the United States. ICP® is a registered trademark of PCB Piezotronics Europe GmbH in Germany and other countries. UHT-12TM is a trademark of PCB Piezotronics, Inc. SensorLine<sup>SM</sup> is a servicemark of PCB Piezotronics, Inc. MTS®, MTS Sensors logo, Temposonics®, SWIFT®, R Series V®, TempoLink®, and RefineMe® are registered trademarks of MTS Systems Corporation in the United States. These marks may be registered or otherwise protected in other countries. Endevco® is a registered trademark of PCB Piezotronics of North Carolina, Inc. d/b/a Endevco in the United States.

EDV-DS-7270A-1220



Endevco is an assumed name of PCB Piezotronics of North Carolina, Inc. and is a designer and manufacturer of sensors, instrumentation, and cables for vibration, shock and pressure measurements, known for innovation of sensor technology for the automotive, aerospace and military markets. Visit [www.endevco.com](http://www.endevco.com) for more information. PCB Piezotronics of North Carolina, Inc. (doing business as Endevco) is a wholly owned subsidiary of PCB Piezotronics, Inc. PCB Piezotronics, Inc. is a designer and manufacturer of microphones, and vibration, pressure, force, torque, load, and strain sensors, as well as the pioneer of ICP® technology used by design engineers and predictive maintenance professionals worldwide for test, measurement, monitoring, and control requirements in automotive, aerospace, industrial, R&D, military, educational, commercial, and OEM applications. PCB also manufactures the Endevco product line of sensors, instrumentation and cables for vibration, shock and pressure measurements. With a worldwide customer support team, 24-hour SensorLine<sup>SM</sup>, and a global distribution network, PCB® is committed to Total Customer Satisfaction. Visit [www.pcb.com](http://www.pcb.com) for more information. PCB Piezotronics, Inc. is a wholly owned subsidiary of MTS Systems Corporation. Additional information on MTS can be found at [www.mts.com](http://www.mts.com).

Aufgrund laufender Weiterentwicklungen sind Änderungen der Spezifikationen vorbehalten. Alle Angaben vorbehaltlich Satz- und Druckfehler.

**nbn Austria GmbH**

Riesstraße 146, 8010 Graz

Tel. +43 316 40 28 05 | Fax +43 316 40 25 06

**nbn**  
nbn@nbn.at | [www.nbn.at](http://www.nbn.at)