


# Triaxial piezoresistive accelerometer

## Model 7284A

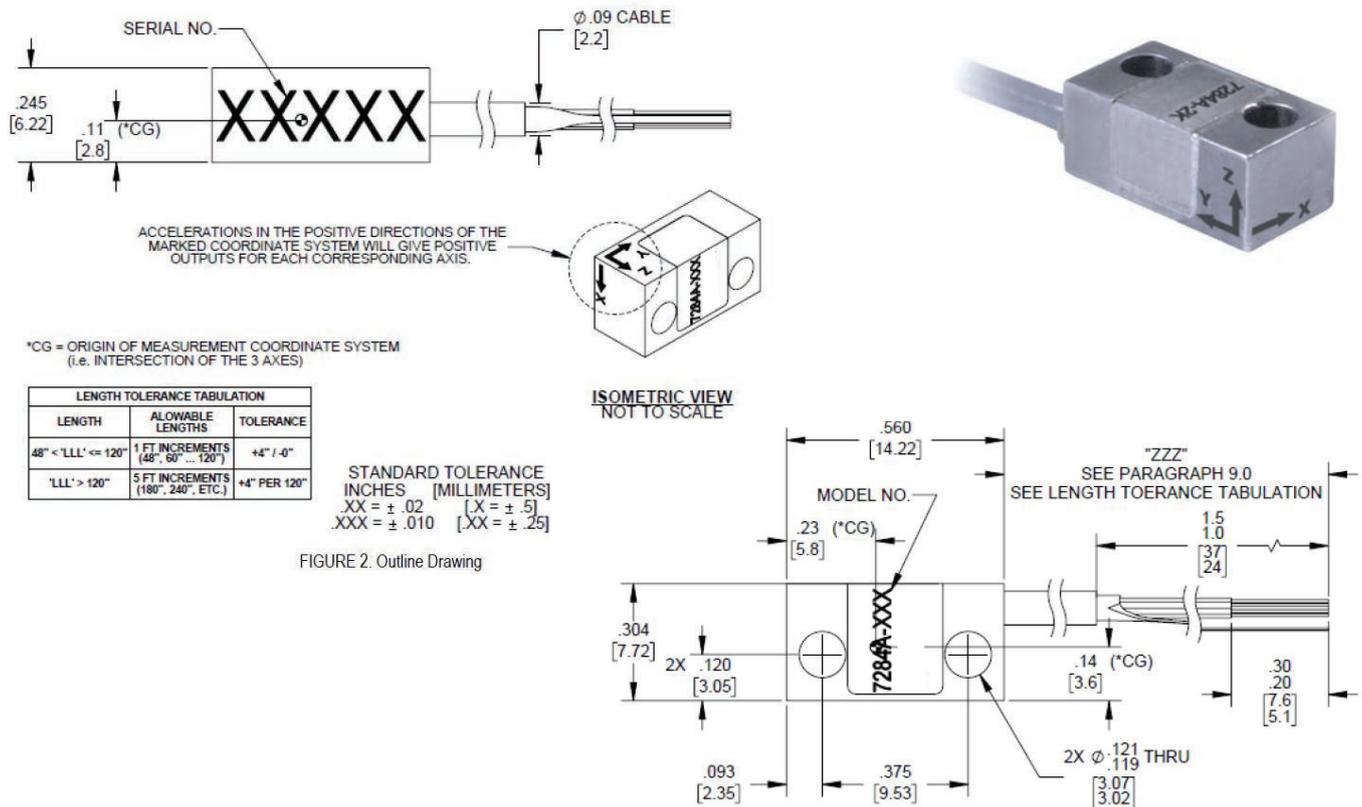

### Key features

- 2K, 20K and 60K g full scale ranges
- Lightly damped for exceptional survivability
- DC response
- Low power consumption
- Improved cable to minimize shock induced noise

### Description

The Endevco® Model 7284A series is a family of rugged, lightly damped, piezoresistive triaxial accelerometers designed for high-acceleration shock measurements in three mutually perpendicular axes. This family uses three sensors that are packaged in a mutually orthogonal arrangement in a bolt-mount package which shares the same footprint and bolt pattern as Endevco's legacy Model 7270A and 7280A product families. The design boasts a robust low noise eight conductor cable that can repeatedly withstand the high-acceleration shock environment.

The Model 7284A utilizes the same sensing element as the Model 72 & 7280A. Each axis uses a unique micro-machined, piezoresistive sensor with light gas damping to attenuate resonant amplitudes, and mechanical stops to reduce breakage under over load conditions. All three axes have the same range. Selectable ranges per axis are available by special request. Calibration at 5V is standard for this model.

## Triaxial piezoresistive accelerometer | Model 7284A

All specifications are referenced at +75°F (+24°C) and 5 Vdc, unless otherwise noted. Calibration data, traceable to National Institute of Standards and Technology (NIST), is supplied.

Specifications				
Dynamic characteristics	Units	2K	20K	60K
Linear range	g	2,000	20,000	60,000
Sensitivity min/typ [1]	μV/g	75/150	4/8	1.25/2.5
Natural frequency (typ)	kHz	30	100	130
Shock limit	g	10,000	60,000	180,000
Zero measureand output (max)	mV/V	±20	±20	±20
Transverse sensitivity	%	5	5	5
Thermal zero shift 0°F to +150°F (-18°C to +66°C)	% FSO/°C	0.06	0.06	0.06
Thermal sensitivity shift	%/°C	-0.2	-0.2	0.2
Electrical characteristics				
Excitation	Vdc	5 to 12 (5 standard)		
Resistance	Vdc			
Input		2,200 ± 700		
Output		6,500 ±2,000		
Isolation resistance	Ω	100 MΩ min at 50 VDC between cable leads and cable shield or case		
Physical characteristics				
Case, material		17-4 PH CRES		
Weight (excluding cable)		3.6 grams (0.13 ounces)		
Cable weight		10.2 grams/meter [0.11 ounces/foot]		
Cable		(8) 34 AWG SPC alloy conductors, with SPC braided shield and FEP jacket		
Mounting		4-40 high strength screws (x2)		
Recommended mounting torque		8 ± 2 lbf-in (0.9 N-m)		
Environmental characteristics				
Temperature				
Operating	°C (F°)	- 55 to + 121 (- 67 to + 250)		
Storage	°C (F°)	- 55 to + 121 (- 67 to + 250)		
Calibration data				
Data for sensitivity, ZMO, input and output resistance are supplied on the calibration certificate. Unless specified by the customer at time of order, the default calibration will be performed at 5 Vdc excitation.				

# Triaxial piezoresistive accelerometer | Model 7284A

Accessories		
Options	Description	7284A
EH815	[2] 4-40 high strength screws	Included
EHW265	[2] No. 4 washers	Included

## Notes

1. Sensitivity measured at 5,000g. 60,000g ranges are subject to International Traffic in Arms regulations (ITAR), and as such a license is required for shipments outside the U.S. and other restrictions may apply.
2. Maintain high levels of precision and accuracy using Endevco's factory calibration services. Call Endevco's inside sales force at 866-ENDEVCO for recommended intervals, pricing and turn-around time for these services as well as for quotations on our standard products.
3. Model number definition:


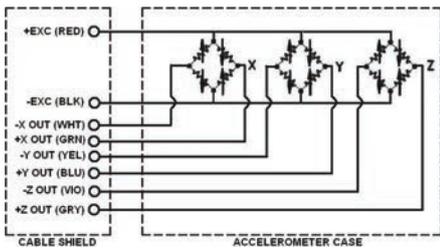


FIGURE 1. Schematic

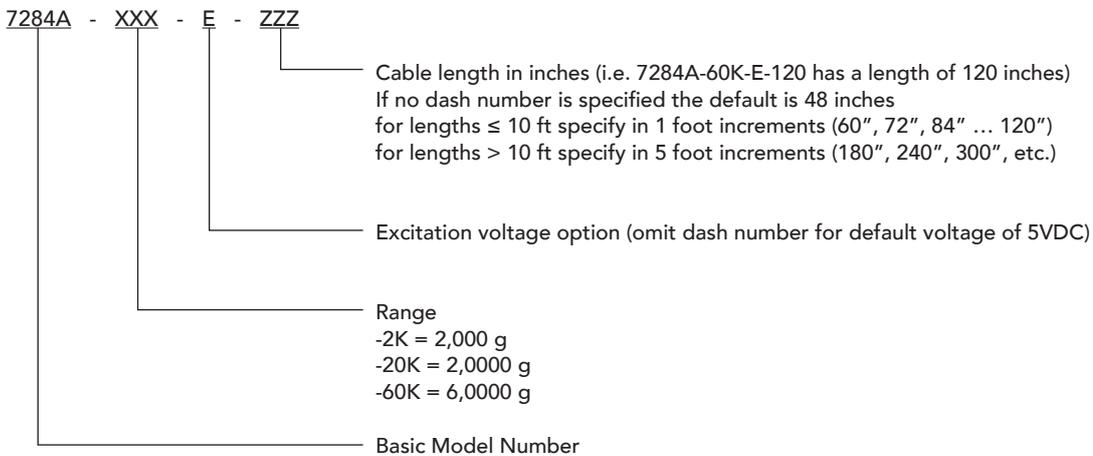

[www.endevco.com](http://www.endevco.com) | Tel: +1 (866) ENDEVCO [+1 (866) 363-3826] | 10869 NC-903, Halifax, NC 27839 USA

© 2020 PCB Piezotronics of North Carolina, Inc. (doing business as Endevco). In the interest of constant product improvement, specifications are subject to change without notice. PCB®, ICP®, Swiveler®, Modally Tuned®, and IMI® with associated logo are registered trademarks of PCB Piezotronics, Inc. in the United States. ICP® is a registered trademark of PCB Piezotronics Europe GmbH in Germany and other countries. UHT-12TM is a trademark of PCB Piezotronics, Inc. SensorLine<sup>SM</sup> is a servicemark of PCB Piezotronics, Inc. MTS®, MTS Sensors logo, Temposonics®, SWIFT®, R Series V®, TempoLink®, and RefineMe® are registered trademarks of MTS Systems Corporation in the United States. These marks may be registered or otherwise protected in other countries. Endevco® is a registered trademark of PCB Piezotronics of North Carolina, Inc. d/b/a Endevco in the United States.

030920



Endevco is an assumed name of PCB Piezotronics of North Carolina, Inc. and is a designer and manufacturer of sensors, instrumentation, and cables for vibration, shock and pressure measurements, known for innovation of sensor technology for the automotive, aerospace and military markets. Visit [www.endevco.com](http://www.endevco.com) for more information. PCB Piezotronics of North Carolina, Inc. (doing business as Endevco) is a wholly owned subsidiary of PCB Piezotronics, Inc. PCB Piezotronics, Inc. is a designer and manufacturer of microphones, vibration, pressure, force, torque, load, and strain sensors, as well as the pioneer of ICP® technology used by design engineers and predictive maintenance professionals worldwide for test, measurement, monitoring, and control requirements in automotive, aerospace, industrial, R&D, military, educational, commercial, OEM applications, and more. With a worldwide customer support team, 24-hour SensorLine<sup>SM</sup>, and a global distribution network, PCB® is committed to Total Customer Satisfaction. Visit [www.pcb.com](http://www.pcb.com) for more information. PCB Piezotronics, Inc. is a wholly owned subsidiary of MTS Systems Corporation. Additional information on MTS can be found at [www.mts.com](http://www.mts.com).

Aufgrund laufender Weiterentwicklungen sind Änderungen der Spezifikationen vorbehalten. Alle Angaben vorbehaltlich Satz- und Druckfehler.

**nbn Austria GmbH**

Riesstraße 146, 8010 Graz

Tel. +43 316 40 28 05 | Fax +43 316 40 25 06

[nbn@nbn.at](mailto:nbn@nbn.at) | [www.nbn.at](http://www.nbn.at)

