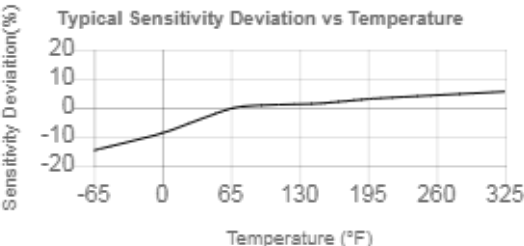


Model Number HV356A44		TRIAxIAL ICP® ACCELEROMETER		Revision: NR ECN #: 56766	
Performance		ENGLISH	SI	OPTIONAL VERSIONS	
Sensitivity(± 10 %)		50 mV/g	5.1 mV/(m/s ²)	Optional versions have identical specifications and accessories as listed for the standard model except where noted below. More than one option may be used.	
Measurement Range		± 100 g pk	± 981 m/s ² pk		
Frequency Range(+/- 5 %)		0.7 to 5,000 Hz	0.7 to 5,000 Hz		
Frequency Range(+/- 10 %)		0.4 to 6,000 Hz	0.4 to 6,000 Hz		
Resonant Frequency		≥ 30 kHz	≥ 30 kHz		
Broadband Resolution(1 to 10,000 Hz)		0.0006 g rms	.006 m/s ² rms [1]		
Non-Linearity		≤ 1 %	≤ 1 % [2]		
Transverse Sensitivity		≤ 7 %	≤ 7 %		
TEDS Compliant(Per IEEE 1451.4)		Yes	Yes		
Environmental					
Overload Limit(Shock)		± 5,000 g pk	± 49,050 m/s ² pk		
Temperature Range(Operating)		-65 to 200 °F	-54 to 93 °C		
Temperature Response		See Graph	See Graph [1]		
Base Strain Sensitivity		.001 g/µε	.01 (m/s ²)/µε [1]		
Electrical					
Excitation Voltage		20 to 30 VDC	20 to 30 VDC		
Constant Current Excitation		2 to 20 mA	2 to 20 mA		
Output Impedance		≤ 200 Ohm	≤ 200 Ohm		
Output Bias Voltage		8 to 12 VDC	8 to 12 VDC		
Discharge Time Constant		0.8 to 2.4 sec	0.8 to 2.4 sec		
Settling Time(within 10% of bias)		≤ 5 sec	≤ 5 sec		
Spectral Noise(1 Hz)		200 µg/√Hz	1,962 (µm/sec ²)/√Hz [1]		
Spectral Noise(10 Hz)		45 µg/√Hz	441 (µm/sec ²)/√Hz [1]		
Spectral Noise(100 Hz)		20 µg/√Hz	196 (µm/sec ²)/√Hz [1]		
Spectral Noise(1 kHz)		6 µg/√Hz	58.9 (µm/sec ²)/√Hz [1]		
Electrical Isolation		2,000 VDC	2,000 VDC [3]		
Physical					
Sensing Element		Ceramic	Ceramic		
Sensing Geometry		Shear	Shear		
Housing Material		Polymer	Polymer		
Sealing		Hermetic	Hermetic		
Size (Height x Length x Width)		0.50 in x 0.80 in x 0.50 in	12.7 mm x 20.3 mm x 12.7 mm		
Weight(without cable)		0.20 oz	5.7 gm [1]		
Electrical Connector		Integral Cable	Integral Cable		
Electrical Connection Position		Side	Side		
Cable Termination		1/4-28 4-Pin Jack	1/4-28 4-Pin Jack		
Cable Length		10.00 ft	3.0 m		
Cable Type		4-conductor shielded, polyolefin jacket	4-conductor shielded, polyolefin jacket		
Mounting		Adhesive	Adhesive		
CE UK CA [4]		Typical Sensitivity Deviation vs Temperature 		NOTES: [1]Typical. [2]Zero-based, least-squares, straight line method. [3]Maximum. [4]See PCB Declaration of Conformance PS023 for details.	
		SUPPLIED ACCESSORIES: Model 080A109 Petro Wax (1) Model 080A90 Quick Bonding Gel (1) Model ACS-1T NIST traceable triaxial amplitude response, 10 Hz to upper 5% frequency. (1)			
Entered: ND		Engineer: MJN	Sales: WDC	Approved: NJF	Spec Number:
Date: 07/21/2026		Date: 07/21/2026	Date: 07/21/2026	Date: 07/21/2026	80035
PCB PIEZOTRONICS AN AMPHENOL COMPANY		Phone: 716-684-0001 Fax: 716-684-0987 E-Mail: info@pcb.com			
3425 Walden Avenue, Depew, NY 14043					
All specifications are at room temperature unless otherwise specified. In the interest of constant product improvement, we reserve the right to change specifications without notice. ICP® is a registered trademark of PCB Piezotronics, Inc.					