

# DATA SHEET





DESIGN • MANUFACTURE • CUSTOMISE • CONFIGURE

## Zirconia O<sub>2</sub> Sensors

### Screened Probe Series - Long Housing

#### FEATURES

- Zirconium dioxide (ZrO<sub>2</sub>) sensing elements
- Long life, non-depleting technology
- Integral heating element
- High accuracy
- Requires an external interface board to operate<sup>a</sup>
- 1.2m Screened cable

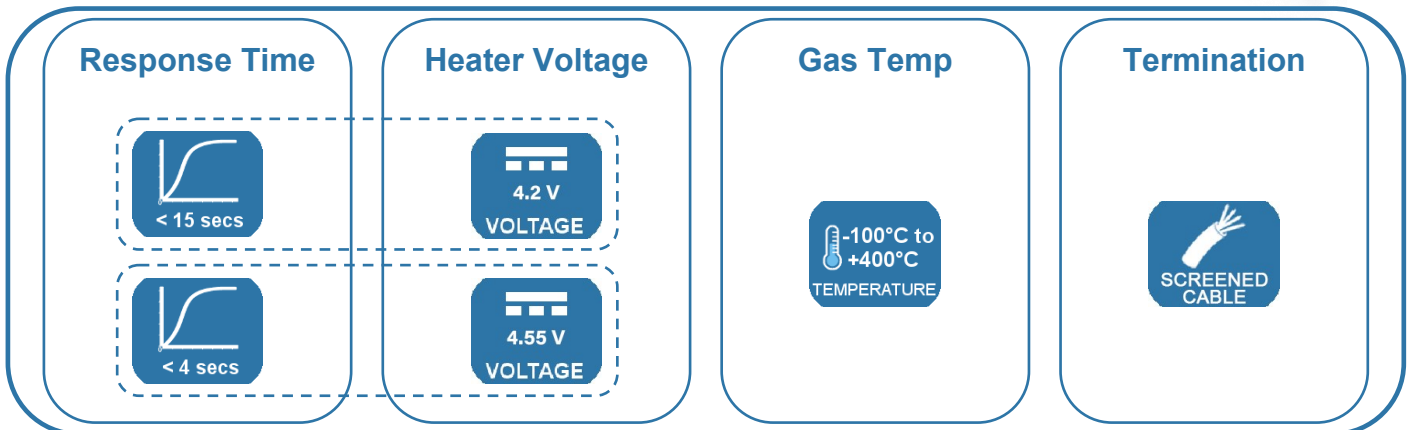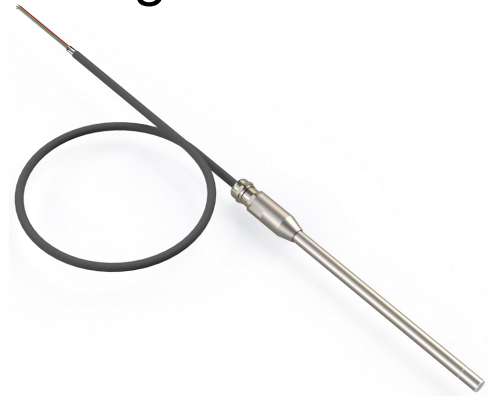

#### BENEFITS

- No reference gas required
- No need for temperature stabilisation
- Three lengths available; 220mm, 400mm and 600mm
- Screened for use in industrial environments

#### OUTPUT VALUES

Oxygen pressure range	2mbar—3bar max
Accuracy	5mbar max
Internal operational temperature	700°C
Response time (10—90% step)	
Standard response sensor	< 15s
Fast response sensor	< 4s
Warm up time (prior to sensor operation)	60s
Warm up time (from standby)	20s
Output stabilisation time	~ 180s

#### TECHNICAL SPECIFICATIONS

Heater voltage <sup>b</sup>	
Operating (<15s response)	4.2V <sub>DC</sub> ± 0.1V <sub>DC</sub> (~1.7A)
Standby	2V <sub>DC</sub> (~0.85A)
Operating (<4s response)	4.55V <sub>DC</sub> ± 0.1V <sub>DC</sub> (~1.85A)
Standby	2V <sub>DC</sub> (~0.85A)
Pump impedance at 700°C <sup>c</sup>	< 6kΩ
Permissible gas temperature	-100°C to +400°C
Gas flow rate	0 - 10 m/s
Repetitive permissible acceleration	5g
Incidental permissible acceleration	30g

Other sensor options available on request, email:  
[technical@sstsensing.com](mailto:technical@sstsensing.com)


**Need help? Ask the expert**  
**Tel: + 44 (0)1236 459 020**  
**and ask for “Technical”**



- Interface board sold separately; contact [technical@sstsensing.com](mailto:technical@sstsensing.com) for details.
- Heater voltages applicable to standard cable lengths, as supplied.
- If providing your own interface board, note that the constant current source used in the pump circuit should be designed to drive a load of up to 6kΩ.

## OUTLINE DRAWING

All dimensions shown in mm.

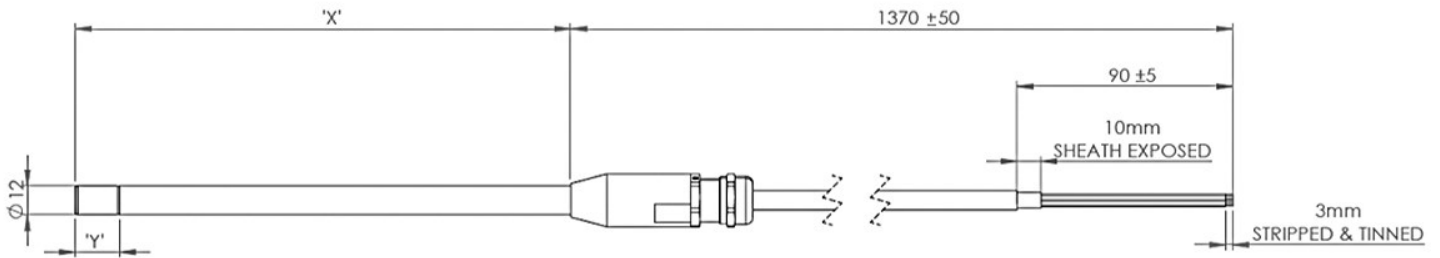

Where 'X' is the probe length, see **Order Information** for details.

Where 'Y' is the cap length;

Standard response - 18mm

Fast response - 15mm

## ELECTRICAL INTERFACE

### Lead Wires

Wire	Designation
Red	Pump
Black	Common
Blue	Sense
White	Heater (1)
Orange	Heater (2)
Bare Wire	Drain / Shield

**NOTE:** Drain / Shield must be correctly terminated to a good ground or earth connection.

## ORDER INFORMATION

Generate your specific part number using the convention shown below. Use only those letters and numbers that correspond to the sensor options you require — omit those you do not.

O 2 S - XX - T 6 - XX - S C R N

Response Time	Probe Length 'X'
<b>Blank</b> Std response < 15s	<b>Blank</b> 400mm
<b>FR</b> Fast response < 4s	<b>SH</b> 220mm
	<b>LG</b> 600mm

### CAUTION

Do not exceed maximum ratings and ensure sensor(s) are operated in accordance with their requirements. Carefully follow all wiring instructions. Incorrect wiring can cause permanent damage to the device. Zirconium dioxide sensors are damaged by the presence of silicone. Vapours (organic silicone compounds) from RTV rubbers and sealants are known to poison oxygen sensors and MUST be avoided. Do NOT use chemical cleaning agents.

**Failure to comply with these instructions may result in product damage.**

### INFORMATION

As customer applications are outside of SST Sensing Ltd.'s control, the information provided is given without legal responsibility. Customers should test under their own conditions to ensure that the equipment is suitable for their intended application. For detailed information on the sensor operation refer to application note AN0043 Operating Principle and Construction of Zirconium Dioxide Oxygen Sensors.

**For technical assistance or advice, please email:**  
[technical@sstsensing.com](mailto:technical@sstsensing.com)

**General Note:** SST Sensing Ltd. reserves the right to make changes to product specifications without notice or liability. All information is subject to SST Sensing Ltd.'s own data and considered accurate at time of going to print.

DS-0170 REV 1

© 2020 SST SENSING LTD.

5 HAGMILL CRESCENT, SHAWHEAD INDUSTRIAL ESTATE, COATBRIDGE, UK ML5 4NS

[www.sstsensing.com](http://www.sstsensing.com) | e: [sales@sstsensing.com](mailto:sales@sstsensing.com) | t: +44 (0)1236 459020 | f: +44 (0)1236 459026

Aufgrund laufender Weiterentwicklungen sind Änderungen der Spezifikationen vorbehalten. Alle Angaben vorbehaltlich Satz- und Druckfehler.

**nbn Austria GmbH**

Riesstraße 146, 8010 Graz

Tel. +43 316 40 28 05 | Fax +43 316 40 25 06

[nbn@nbn.at](mailto:nbn@nbn.at) | [www.nbn.at](http://www.nbn.at)



**nbn**